www.russol.org

14s-73-20-3ed



Name: 14s-73-20-3ed
Type: Control valves - 14s type
Subtype: Medium parameters valves
Operating medium: steam
Body material: 20ГСЛ

DESCRIPTION:

Control valves are the most used valve type designed for continuous or discrete adjustment of flow and pressure.

TECHNICAL DATA:

Diameter, DN: 300 mm
Pressure, PN: 6.3 MPa
Temperature: 450 СЉ
Discharge rate (Kv): 915 m3/h
Passage area: 260 cm2
Discharge coefficient: 0.7
Rotational moment on the shaft: 110 Ngm
Number of revolutions: 20
Operating stroke: 120 mm

DIMENSIONS:


D1: 303 mm
D2: 330 mm
L: 800 mm
H: 1312 mm
A: 385 mm
Weight: 700 кг

ACTUATOR:

Control type: Э
Actuator model: AUMA SAR 14.6-F14-C38
Actuator power: 1.6 kW
Full stroke time: 26.7 s

DIMENSIONAL DRAWING:

Tel.: +7 (3852) 390 - 530
info@russol.org

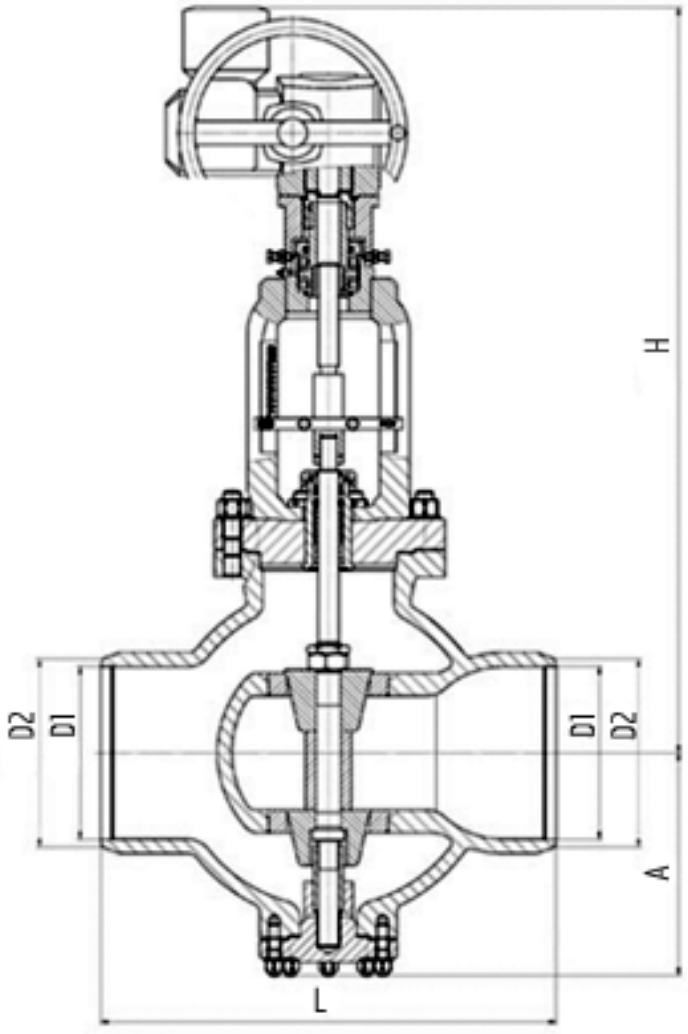

Tel.: +7 (3852) 390 - 530
info@russol.org