



Name: 1053-50-cz Type: Globe valves

Subtype: High parameters valves

Operating medium: steam **Body material:** 12X1MΦ



DESCRIPTION:

Globe valves are designed for full fluid flow cut-off and equipped with shut-off device. These valves must be fully open or close during their operation. Globe valves are always single-seated.

TECHNICAL DATA:

Diameter, DN: 50 mm Pressure, PN: 13.7 MPa Temperature: 560 C

Hydraulic resistance coefficient: 7

Rotational moment on the shaft: 250 Ngm

Number of revolutions: 6 Operating stroke: 36 mm

DIMENSIONS:

D1: 50 mm D2: 80 mm L: 250 mm H: 770 mm A: 95 mm

Weight (w/o actuator): 36.5 kg Weight (with actuator): 60.5 kg

ACTUATOR:


Control type: Ц

Actuator model: Редуктор 2:1

Actuator power: - kW Full stroke time: - s

DIMENSIONAL DRAWING:



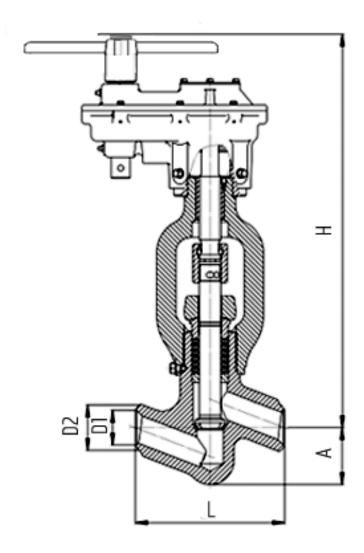

Page 2/2 Tel.: +7 (3852) 390 - 530 info@russol.org