



Name: 1057-65-ea Type: Globe valves

Subtype: High parameters valves

Operating medium: steam **Body material:** 12X1MΦ



DESCRIPTION:

Globe valves are designed for full fluid flow cut-off and equipped with shut-off device. These valves must be fully open or close during their operation. Globe valves are always single-seated.

TECHNICAL DATA:

Diameter, DN: 65 mm

Pressure, PN: 9.800000000000007 MPa

Temperature: 540 C

Hydraulic resistance coefficient: 7

Rotational moment on the shaft: 250 Ngm

Number of revolutions: 6 Operating stroke: 36 mm

DIMENSIONS:

D1: 62 mm D2: 80 mm L: 250 mm H: 730 mm A: 95 mm

Weight (w/o actuator): 34.8 kg Weight (with actuator): 134.8 kg


ACTUATOR:

Control type: 3

Actuator model: 792-3-0a-01 Actuator power: 1.32 kW Full stroke time: 18 s

DIMENSIONAL DRAWING:



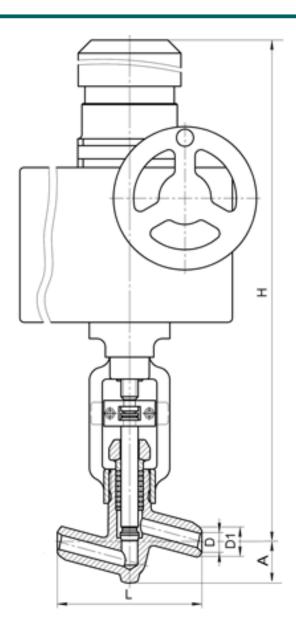

Page 2/2 Tel.: +7 (3852) 390 - 530 info@russol.org