www.russol.org

1057-65-ed

Name: 1057-65-ed
Type: Globe valves
Subtype: High parameters valves
Operating medium: steam
Body material: 12Х1МФ



DESCRIPTION:

Globe valves are designed for full fluid flow cut-off and equipped with shut-off device. These valves must be fully open or close during their operation. Globe valves are always single-seated.

TECHNICAL DATA:

Diameter, DN: 65 mm
Pressure, PN: 9.8000000000000007 MPa
Temperature: 540 C
Hydraulic resistance coefficient: 7
Rotational moment on the shaft: 250 Ngm
Number of revolutions: 6
Operating stroke: 36 mm

DIMENSIONS:


D1: 62 mm
D2: 80 mm
L: 250 mm
H: 837 mm
A: 95 mm
Weight (w/o actuator): 42.8 kg
Weight (with actuator): 95.8 kg

ACTUATOR:

Control type: Э
Actuator model: AUMA SA 14.6-F14-C38
Actuator power: 0.8 kW
Full stroke time: 16 s

DIMENSIONAL DRAWING:

Tel.: +7 (3852) 390 - 530
info@russol.org

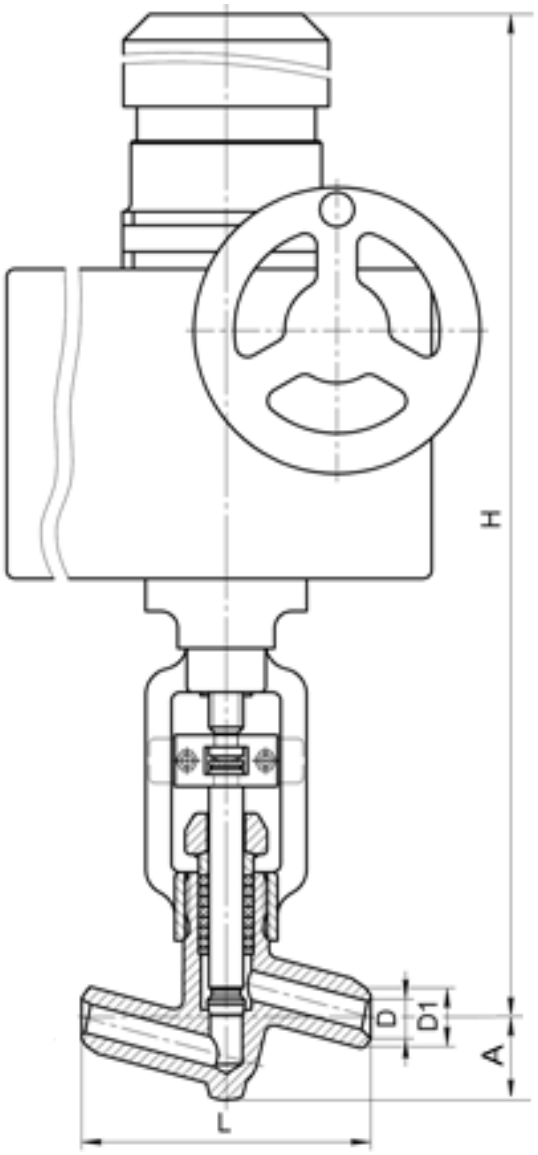

Tel.: +7 (3852) 390 - 530
info@russol.org