



Name: 1057-65-en Type: Globe valves

Subtype: High parameters valves

**Operating medium:** steam **Body material:** 12X1MΦ



# **DESCRIPTION:**

Globe valves are designed for full fluid flow cut-off and equipped with shut-off device. These valves must be fully open or close during their operation. Globe valves are always single-seated.

# **TECHNICAL DATA:**

Diameter, DN: 65 mm

Pressure, PN: 9.800000000000007 MPa

Temperature: 540 C

Hydraulic resistance coefficient: 7

Rotational moment on the shaft: 250 Ngm

Number of revolutions: 6 Operating stroke: 36 mm

#### **DIMENSIONS:**

D1: 62 mm D2: 80 mm L: 250 mm H: 811 mm A: 95 mm

Weight (w/o actuator): 42.3 kg Weight (with actuator): 80.3 kg

### **ACTUATOR:**


Control type: 3

Actuator model: ЭΠ-3-300-25-Б1-O-A-У1

Actuator power: 0.75 kW Full stroke time: 14 s

### **DIMENSIONAL DRAWING:**



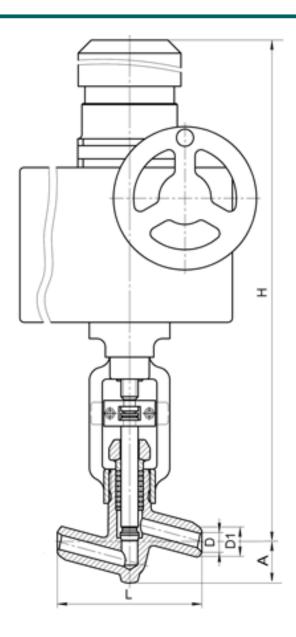

Page 2/2 Tel.: +7 (3852) 390 - 530 info@russol.org