



Name: 1s-25-2

Type: Globe valves - 1s type

**Subtype:** Medium parameters valves **Operating medium:** water-steam

**Body material: 20** 



# **DESCRIPTION:**

Globe valves are designed for full fluid flow cut-off and equipped with shut-off device. These valves must be fully open or close during their operation. Globe valves are always single-seated.

# **TECHNICAL DATA:**

Diameter, DN: 15 mm Pressure, PN: 25 MPa Temperature: 450 C

Hydraulic resistance coefficient: 5

Rotational moment on the shaft: 80 Ngm

Number of revolutions: 4 Operating stroke: 16 mm

### **DIMENSIONS:**

D1: 16 mm D2: 32 mm L: 160 mm H: 283 mm A: 46 mm


Weight (w/o actuator): 0 kg Weight (with actuator): 5.8 kg

# **ACTUATOR:**

Control type: M Actuator model: -Actuator power: - kW Full stroke time: - s

# **DIMENSIONAL DRAWING:**



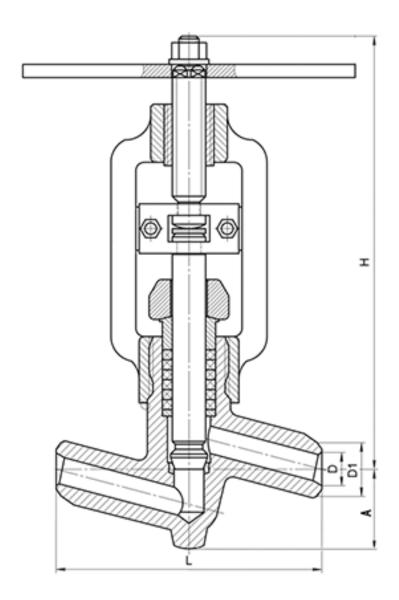

Page 2/2 Tel.: +7 (3852) 390 - 530 info@russol.org