



Name: 999-20-0 Type: Globe valves

**Subtype:** High parameters valves

**Operating medium:** steam **Body material:** 12X1MΦ



## **DESCRIPTION:**

Globe valves are designed for full fluid flow cut-off and equipped with shut-off device. These valves must be fully open or close during their operation. Globe valves are always single-seated.

### **TECHNICAL DATA:**

Diameter, DN: 20 mm Pressure, PN: 25 MPa Temperature: 545 C

Hydraulic resistance coefficient: 5

Rotational moment on the shaft: 80 Ngm

Number of revolutions: 4 Operating stroke: 16 mm

#### **DIMENSIONS:**

D1: 20 mm D2: 32 mm L: 160 mm H: 283 mm A: 46 mm


Weight (w/o actuator): 0 kg Weight (with actuator): 5.6 kg

### **ACTUATOR:**

Control type: M Actuator model: -Actuator power: - kW Full stroke time: - s

# **DIMENSIONAL DRAWING:**



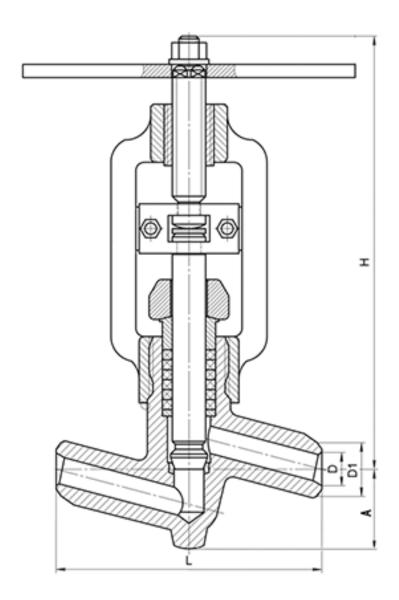

Page 2/2 Tel.: +7 (3852) 390 - 530 info@russol.org