


**Name:** 935-250-0b  
**Type:** Swing check valves  
**Subtype:** High parameters valves  
**Operating medium:** water  
**Body material:** 20ГЦЛ

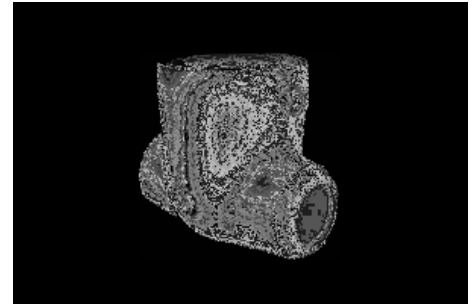

#### DESCRIPTION:

Swing check valves are designed to prevent a change of fluid flow direction in case of emergency situations. These valves are used at pipelines as automatic safety devices.

#### TECHNICAL DATA:

Diameter, DN: 250 mm  
Pressure, PN: 23.5 MPa  
Temperature: 250 C  
Hydraulic resistance coefficient: 2

#### DIMENSIONS:

D1: 271 mm  
D2: 340 mm  
L: 840 mm  
H: 560 mm  
A: 220 mm  
Weight: 1015 кг

#### DIMENSIONAL DRAWING:

