


Name: IDF-DSA-43-500-1
Russian name: ДОД-43-500-1
Type: Two-stage axial ID fans
Notes: Hot-stamped blades from wedge steel billets

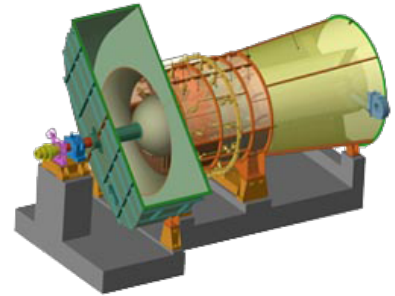

DESCRIPTION:

Two-stage axial ID fans are designed for flue gas removal from combustion chambers of solid fuel and gas-and-oil-fired boilers with the capacity of 640-2650 t/h. These fans are geared for continuous operation indoors and outdoors. The main units of double-stage axial ID fan are: two running wheels, running gear, casing, inlet box, diffuser, two guide vanes, straightener and supports.

AERODYNAMIC PERFORMANCE:

Capacity: 1725.0 ths. m³
Total pressure: 4932 Pa
Temperature: 200 C
Efficiency: 82,5 %
Dustiness: 0.5 g/m³

DIMENSIONS:

Length: 15100 mm
Width: 7700 mm
Height: 9420 mm
Weight: 102 000 kg

ELECTRIC MOTOR:

Power: 3150 kW
Rate speed: 600 rpm
Moment of inertia: 28000 kg*m²

AUXILIARIES:

Actuator: 10000 Hm

DELIVERY OPTIONS:

Railway: Flatcar: 6 | Open wagon: 1 | Schnabel car: 1

DIMENSIONAL DRAWING:

