
DRF-7-40-5-E5-5.5



Name: DRF-7-40-5-E5-5.5
Russian name: ВЦП 7-40 №5 Исп.5, 5,5 кВт
Type: Dust-exhaust fans
Notes: It is recommended to use vibration isolators of CVI-41 type in quantity of 4 pcs.

DESCRIPTION:

Dust-exhaust fans of DRF-7-40 type are widely used in general purpose air ventilation systems, in dust-trapping units, in granular material pneumatic conveying systems, in grain processing lines, in dust-loaded air bleed systems within cement and reinforced concrete structure production. Also these fans are used for wood chips and saw-dust removal, for metal dust suction, for slag and dust removal in welding industry and for other industrial and sanitary-engineering purposes. These medium pressure fans are manufactured in right-hand and left-hand rotations with radial blades. In accordance with the field of application these fans can be produced in the following modifications:

 - general purpose industrial modification (carbon steel)

 - corrosion-resistant modification (stainless steel)

 - corrosion-resistant modification (titanium alloys)

AERODYNAMIC PERFORMANCE:

Capacity: 7.2 ths. m3
Total pressure: 1400 Pa
Temperature: 80 C
Efficiency: 50-58 %
Dustiness: 600.0 g/m3

DIMENSIONS:

Length: 1432 mm
Width: 650 mm
Height: 822,5 mm
Weight: 210 kg

ELECTRIC MOTOR:


Power: 5,5 kW
Rate speed: 1760 rpm
Moment of inertia: n/a kg*m2

Tel.: +7 (3852) 390 - 530
info@russol.org

AUXILIARIES:
Actuator: n/a Нм

DELIVERY OPTIONS:
Railway: Flatcar: 1 | Open wagon: 0 | Schnabel car: 0

DIMENSIONAL DRAWING:

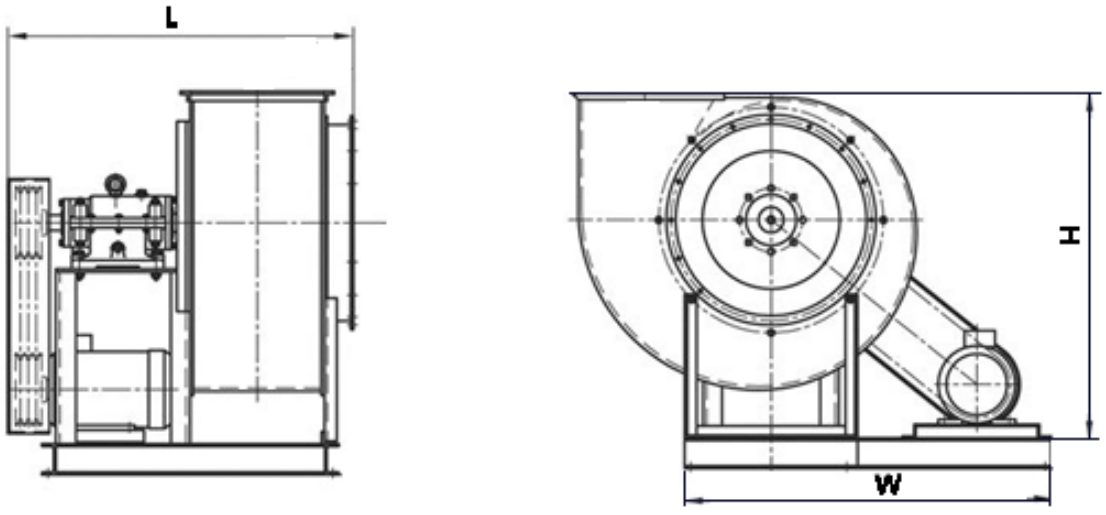

Tel.: +7 (3852) 390 - 530
info@russol.org